

DESIGN OF AN APPARATUS FOR TESTING THE FLAMMABILITY OF FUEL SPRAYS

**Thor I. Eklund
and
William E. Neese**



MAY 1978

FINAL REPORT

Document is available to the U.S. public through
the National Technical Information Service,
Springfield, Virginia 22161.

Prepared for

**U.S. DEPARTMENT OF TRANSPORTATION
FEDERAL AVIATION ADMINISTRATION
Systems Research & Development Service
Washington, D.C. 20590**

FSS000467R

METRIC CONVERSION FACTORS


Approximate Conversions to Metric Measures

| Symbol | When You Know | Multiply by | To Find | Symbol |
|----------------------------|------------------------|----------------------------|---------------------|-----------------|
| LENGTH | | | | |
| in | inches | 2.5 | centimeters | cm |
| ft | feet | 30 | centimeters | cm |
| yd | yards | 0.9 | meters | m |
| mi | miles | 1.6 | kilometers | km |
| AREA | | | | |
| in ² | square inches | 6.5 | square centimeters | cm ² |
| ft ² | square feet | 0.09 | square meters | m ² |
| yd ² | square yards | 0.8 | square meters | m ² |
| mi ² | square miles | 2.6 | square kilometers | km ² |
| | acres | 0.4 | hectares | ha |
| MASS (weight) | | | | |
| oz | ounces | 28 | grams | g |
| lb | pounds | 0.45 | kilograms | kg |
| | short tons (2000 lb) | 0.9 | tonnes | t |
| VOLUME | | | | |
| tsp | teaspoons | 5 | milliliters | ml |
| Tbsp | tablespoons | 15 | milliliters | ml |
| fl oz | fluid ounces | 30 | milliliters | ml |
| c | cups | 0.24 | liters | l |
| pt | pints | 0.47 | liters | l |
| qt | quarts | 0.95 | liters | l |
| gal | gallons | 3.8 | liters | l |
| ft ³ | cubic feet | 0.03 | cubic meters | m ³ |
| yd ³ | cubic yards | 0.76 | cubic meters | m ³ |
| TEMPERATURE (exact) | | | | |
| °F | Fahrenheit temperature | 5/9 (after subtracting 32) | Celsius temperature | °C |

*1 in = 2.54 (exactly). For other exact conversions and more detailed tables, see NBS Misc. Publ. 286, Units of Weights and Measures, Price \$2.25, SD Catalog No. C13.10286.

Approximate Conversions from Metric Measures

| Symbol | When You Know | Multiply by | To Find | Symbol |
|----------------------------|-----------------------------------|-------------------|------------------------|-----------------|
| LENGTH | | | | |
| mm | millimeters | 0.04 | inches | in |
| cm | centimeters | 0.4 | inches | in |
| m | meters | 3.3 | feet | ft |
| m | meters | 1.1 | yards | yd |
| km | kilometers | 0.6 | miles | mi |
| AREA | | | | |
| cm ² | square centimeters | 0.16 | square inches | in ² |
| m ² | square meters | 1.2 | square yards | yd ² |
| km ² | square kilometers | 0.4 | square miles | mi ² |
| ha | hectares (10,000 m ²) | 2.5 | acres | ac |
| MASS (weight) | | | | |
| g | grams | 0.035 | ounces | oz |
| kg | kilograms | 2.2 | pounds | lb |
| t | tonnes (1000 kg) | 1.1 | short tons | short tons |
| VOLUME | | | | |
| ml | milliliters | 0.03 | fluid ounces | fl oz |
| l | liters | 2.1 | pints | pt |
| l | liters | 1.06 | quarts | qt |
| l | liters | 0.26 | gallons | gal |
| m ³ | cubic meters | 35 | cubic feet | ft ³ |
| m ³ | cubic meters | 1.3 | cubic yards | yd ³ |
| TEMPERATURE (exact) | | | | |
| °C | Celsius temperature | 9/5 (then add 32) | Fahrenheit temperature | °F |



| | | | | | |
|---|--|--|--|--|-----------|
| 1. Report No. FAA-RD-78-54 | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle DESIGN OF AN APPARATUS FOR TESTING THE FLAMMABILITY OF FUEL SPRAYS | | | | 5. Report Date May 1978 | |
| | | | | 6. Performing Organization Code | |
| 7. Author(s) Thor I. Eklund William E. Neese | | | | 8. Performing Organization Report No. FAA-NA-78-6 | |
| 9. Performing Organization Name and Address Federal Aviation Administration National Aviation Facilities Experimental Center Atlantic City, New Jersey 08405 | | | | 10. Work Unit No. (TRAIS) | |
| | | | | 11. Contract or Grant No. 181-520-100 | |
| 12. Sponsoring Agency Name and Address U.S. Department of Transportation Federal Aviation Administration Systems Research and Development Service Washington, D.C. 20590 | | | | 13. Type of Report and Period Covered Final July 1975 - December 1977 | |
| | | | | 14. Sponsoring Agency Code | |
| 15. Supplementary Notes | | | | | |
| 16. Abstract An automated small-scale test apparatus was developed for flammability testing of modified fuels. The test configuration consists of a 1/4 inch fuel delivery tube within a 1 inch air atomization pipe followed by a diffuser section. A pressurized 30 gallon air tank supplies the atomization air while a syringe pump provides a specified fuel quantity for all tests. Isentropic calculations and hot wire anemometer measurements characterize the air flow during the transient air release. Oscillograph traces specify the sequencing and timing of events. It is concluded that this transient test is a practical device for modified fuel testing because of its simple construction, well-defined operation, and capability of distinguishing between candidate additives. | | | | | |
| 17. Key Words Flammability Ignition Turbine Fuels Modified Fuel Antimisting Fuels Test Apparatus | | | | 18. Distribution Statement Document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22151 | |
| 19. Security Classif. (of this report) Unclassified | | 20. Security Classif. (of this page) Unclassified | | 21. No. of Pages 28 | 22. Price |

TABLE OF CONTENTS

| | Page |
|------------------------|------|
| INTRODUCTION | 1 |
| Purpose | 1 |
| Background | 1 |
| Experimental Objective | 1 |
| DISCUSSION | 2 |
| Test Apparatus | 2 |
| Operation | 2 |
| Fuel Performance | 4 |
| CONCLUSIONS | 5 |
| REFERENCES | 5 |
| APPENDICES | |
| A - Flow Diagnosis | |
| B - Design Details | |

LIST OF ILLUSTRATIONS

| Figure | | Page |
|--------|------------------------------|------|
| 1 | Modified Fuel Test Apparatus | 6 |
| 2 | Breadboard Assembly | 7 |
| 3 | Fuel Pump Assembly | 8 |
| 4 | Test Apparatus - Top View | 9 |
| 5 | Test Apparatus - Side View | 10 |
| 6 | Air Supply System | 11 |
| 7 | Fuel Atomization Section | 12 |
| 8 | Oscillograph Record | 13 |
| 9 | Jet A Test | 14 |
| 10 | FM-9 Test | 15 |

INTRODUCTION

PURPOSE.

The purpose of this project was the development of a small-scale test apparatus for the comparison of the flammability of modified fuel sprays.

BACKGROUND.

Two practical problems have hindered attempts to develop antimisting fuels and to correlate results of tests at different laboratories. One problem has been the lack of simple rheological tests to measure additive effectiveness from a fluid flow perspective. The other problem has been the lack of a widely accepted spray flammability test that could be used for screening and evaluating prospective antimisting fuels.

The rheological characteristics of a number of additives have been comprehensively described (reference 1), but more work is required to demonstrate that any one test could indicate the effectiveness of an additive. Such tests are essential to ensure that identical additives tested at different installations are the same in their fluid properties. Past experience has shown that the molecular weight distribution and possibly the structure of the additive macromolecules are susceptible to change through mixing, pumping, and aging.

With regard to spray flammability, a wide variety of tests had been used for antimisting fuels (reference 2). The majority of these tests had been large-scale and unique to a particular laboratory. The most realistic tests clearly show the crucial effect of airspeed on antimisting fuel flammability (reference 3). Nevertheless, except for the "mist flashback technique" (reference 4), no small-scale techniques are available to evaluate antimisting fuels. The large droplet size and nonspherical geometries involved in antimisting fuel sprays have been documented previously (reference 5). The feasibility of reproducing the droplet geometries on a small scale has also been demonstrated (reference 6).

In general, laboratory scale experiments used in scientific studies of spray combustion are too small to accommodate the particle sizes produced by antimisting fuels. Any small-scale test would have as its main requirement the production of coarse sprays similar to those documented in larger-scale tests.

EXPERIMENTAL OBJECTIVE.

The experimental objective was to develop a small-scale spray flammability test that would create spray geometries observed in larger-scale tests and be inexpensive to fabricate. The small-scale test should be adequate for screening and evaluating antimisting fuel candidates, and be self-contained so that neither extensive nor specialized facilities would be required for use.

DISCUSSION

TEST APPARATUS.

The test configuration was based on earlier developmental work in a fuel spray photographic chamber (reference 6). The atomization technique involves injection of fuel through a 1/4-inch tube concentric and concurrent with a high-velocity airstream in a 1-inch pipe. The fuel and air mixture is then diffused through a cone to a lower velocity. Downstream of the cone, the mixture is passed over a propane torch igniter. The airflow from the apparatus is at a decreasing but specified rate, due to a sonic orifice in the 1-inch pipe. The air is supplied from a pressurized 30-gallon tank. The fuel flow is a known constant rate as supplied by a syringe pump with a screw-type drive. In the test, a fuel that is finely atomized will readily burn at the propane torch. However, an antimisting fuel will not burn when its rheological behavior minimizes the degree of atomization from the airstream.

Figure 1 shows an overall view of the complete test apparatus. Facility air is used to pressurize the air tank, and an auxiliary propane tank supplies the igniter torch. Figure 2 shows the breadboard test apparatus final to packaging. Included in the illustration are the air supply tank (DeVilbiss Type TA-470), the air control solenoid (Atkomatic No. 600), the orifice flange, the air pipe, and the diffuser cone. On the table is the timer (Industrial Timer, model RC-1) which controls the test sequence automatically. Also visible in figure 2 is the fuel pump assembly. Figure 3 shows the complete fuel pump and screw motor. Design details are found in appendix B.

A top view of the assembled test is shown in figure 4 and a side view in figure 5. The control switches and lights are visible in the top view, while the wiring and plumbing are evident in the side view. The side panels, wiring, and the plumbing are shown in figures 4 and 5. The essential features of the test device are the breadboard components of figure 2. These essential features are detailed in figures 6 and 7. Figure 6 shows a schematic of the air supply system and details the 0.25-inch sonic orifice construction and identifies the components by manufacturer. Figure 7 details the fuel delivery system, the diffuser, and the ignition assembly, and the relevant callouts are identified in the legend. The electrical circuit which controls the test is found in appendix B.

The air and fuel system, as controlled by the timer, provide a well defined and repeatable test for the antimisting additives.

OPERATION.

The test apparatus can safely be operated in a laboratory or shop area. No safety devices other than a hand-held CO₂ extinguisher are required, since the quantities of fuel tested are small. Indoor operation allows temperatures to be consistently maintained at approximately 68° Fahrenheit (F) and prevents winds and drafts from affecting the spray flow at the diffuser exit.

In the test procedure, the air tank is pressurized to approximately 100 pounds per square inch gauge (psig) from either facility air or a small compressor. The operator will flush the fuel cylinder three times with the fuel to be tested. This eliminates the residue from previous tests. A retract switch and extend switch on the control panel allow the operator to override the timer circuit for the flushing operation.

The test is initiated by a sequencer switch and occurs automatically. The order of the operations, along with the time from start, is as follows:

1. Sequence switch activated, 0.0 second
2. Igniter spark turned on, 1.5 seconds
3. Propane turned on, 3.4 seconds
4. Air turned on, 5.0 seconds
5. Fuel turned on, 5.8 seconds
6. Igniter spark turned off, 6.9 seconds
7. Fuel turned off, 9.5 seconds
8. Propane stops, 10.7 seconds
9. Air stops, 10.9 seconds

An oscillograph trace of the process is shown in figure 8. Identified on the trace are noise spikes which mark the events as well as continuous traces for the tank pressure drop, the air pipe temperature, a hot-wire anemometer in the air pipe, and the fuel pump motor. The latter trace was used to more clearly identify the time at which fuel delivery started and the time that it stopped. Appendix A includes detailed isentropic calculations for the airflow along with the velocity measurements from the hot wire. The agreement between the calculations and measurements is satisfactory. The measurements define an initial peak centerline air velocity in the pipe at over 280 feet per second (ft/s). The velocity drops nearly linearly during the test to approximately 210 ft/s. Thus the sample fuel is initially sheared by a high velocity air-stream in the pipe. The fuel and air then decelerate as they pass through the cone.

The total fuel flow during a test was measured at 37 cubic centimeters (cc). Some of the tests showed fuel loss from the spray through dripping from the diffuser mouth during or after the test. Two fuels, Conoco AM-1 and Imperial Chemical Industries FM-4, showed no dripping at all. These are fuels characterized by high tensile viscosities. Neat Jet A lost 5 cc to dripping during the test and 3 cc to dripping immediately after the test. This represented a total loss of over 20 percent. Imperial Chemical Industries FM-9 showed no dripping during the test but did show a 6 cc loss immediately after the test. FM-9 is not characterized by a pronounced tensile viscosity. Apparently a high tensile viscosity inhibits the spreading of fuel to the walls of the diffuser. This loss of fuel to the apparatus walls should be subtracted from the total fuel flow in any determinations of the fuel-air ration of the fuel sprays.

FUEL PERFORMANCE.

The fuels tested included Jet A and the antimisting fuels FM-4, AM-1, and FM-9. For the antimisting fuels, the weight percentages of the additives in Jet A were 0.4 percent, 0.2 percent, and 0.3 percent respectively. Qualitatively, the ignitability behavior was similar to that observed in other tests (references 5 and 6). Figure 9 shows the fire resulting from ignition of Jet A. In contrast is the ignition attempt on FM-9 as shown in figure 10. Both FM-4 and AM-1 showed pronounced lengthening of the flame behind the torch, but neither showed the lateral flame propagation evidenced by the Jet A.

The test apparatus has the flexibility to vary operating conditions. Change in air tank pressure or orifice plate results in a change in air delivery rate. A change in diameter of the fuel piston pump would change fuel-flow rate. The configuration and settings described in this report were developed by varying orifice size and tank operating pressure to get: (1) minimum dripping from the diffuser, (2) a repeatable Jet A flame, (3) good drop trajectories, and (4) lengthening of the torch flame with AM-1 and FM-4. For instance, at low air-flow rates, the AM-1 fuel strands dropped below the propane torch. At excessively high airflow rates, the Jet A fuel-air ratio began to show lean fire characteristics, and the FM-4 and AM-1 showed little torch lengthening.


CONCLUSIONS

The design, construction, and evaluation of a small-scale flammability test lead to two conclusions:

1. A simple and portable flammability test for fuel sprays is feasible.
2. Use of a transient air supply and a timed sequence of test events provides a well-defined and quantified test environment.

REFERENCES

1. Mannheimer, R. J., Rheology Study of Antimist Fuels, Report FAA-RD-77-10, Federal Aviation Administration, 1977.
2. Weatherford, W. D., Jr. and Wright, B. R., Status of Research on Antimist Aircraft Turbine Engine Fuels in the United States, AGARD/NATO 45th Meeting, Aircraft Fire Safety, Rome, Italy, April 7, 1975.
3. San Miguel, A., and Williams, M. D., Antimisting Fuel Spillage/Air Shear Tests at NWC, FAA Final Report in preparation.
4. Wright, B. R., Stavinocha, L. L., and Weatherford, W. D., Jr., A Technique for Evaluating Fuel Mist Flammability, Interim Report AFLRL No. 25, AD 776965, December 1973.
5. Zinn, S. V., Eklund, T. I., and Neese, W. E., Photographic Investigation of Modified Fuel Breakup and Ignition, Report FAA-RD-76-109, Federal Aviation Administration, 1976.
6. Eklund, T. I., Experimental Scaling of Modified Fuel Breakup, Report FAA-RD-77-114, Federal Aviation Administration, 1977.
7. Shapiro, A. H., The Dynamics and Thermodynamics of Compressible Fluid Flow, The Ronald Press Company, New York, 1953.

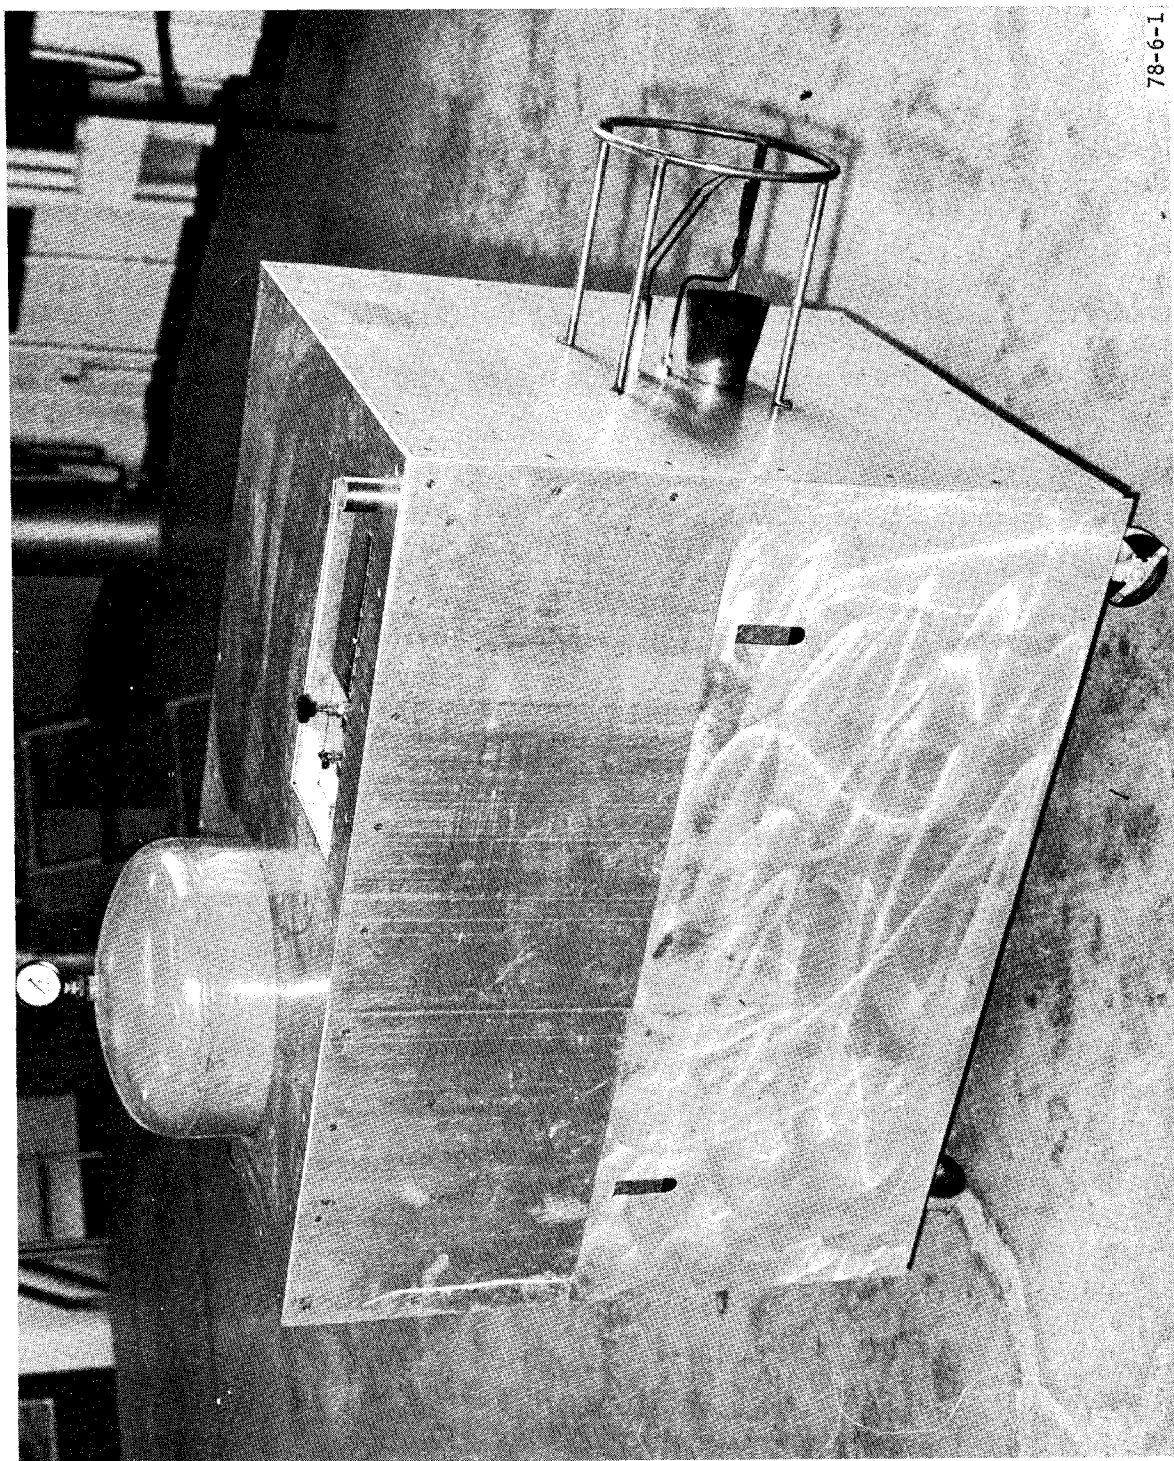

78-6-1

FIGURE 1. MODIFIED FUEL TEST APPARATUS

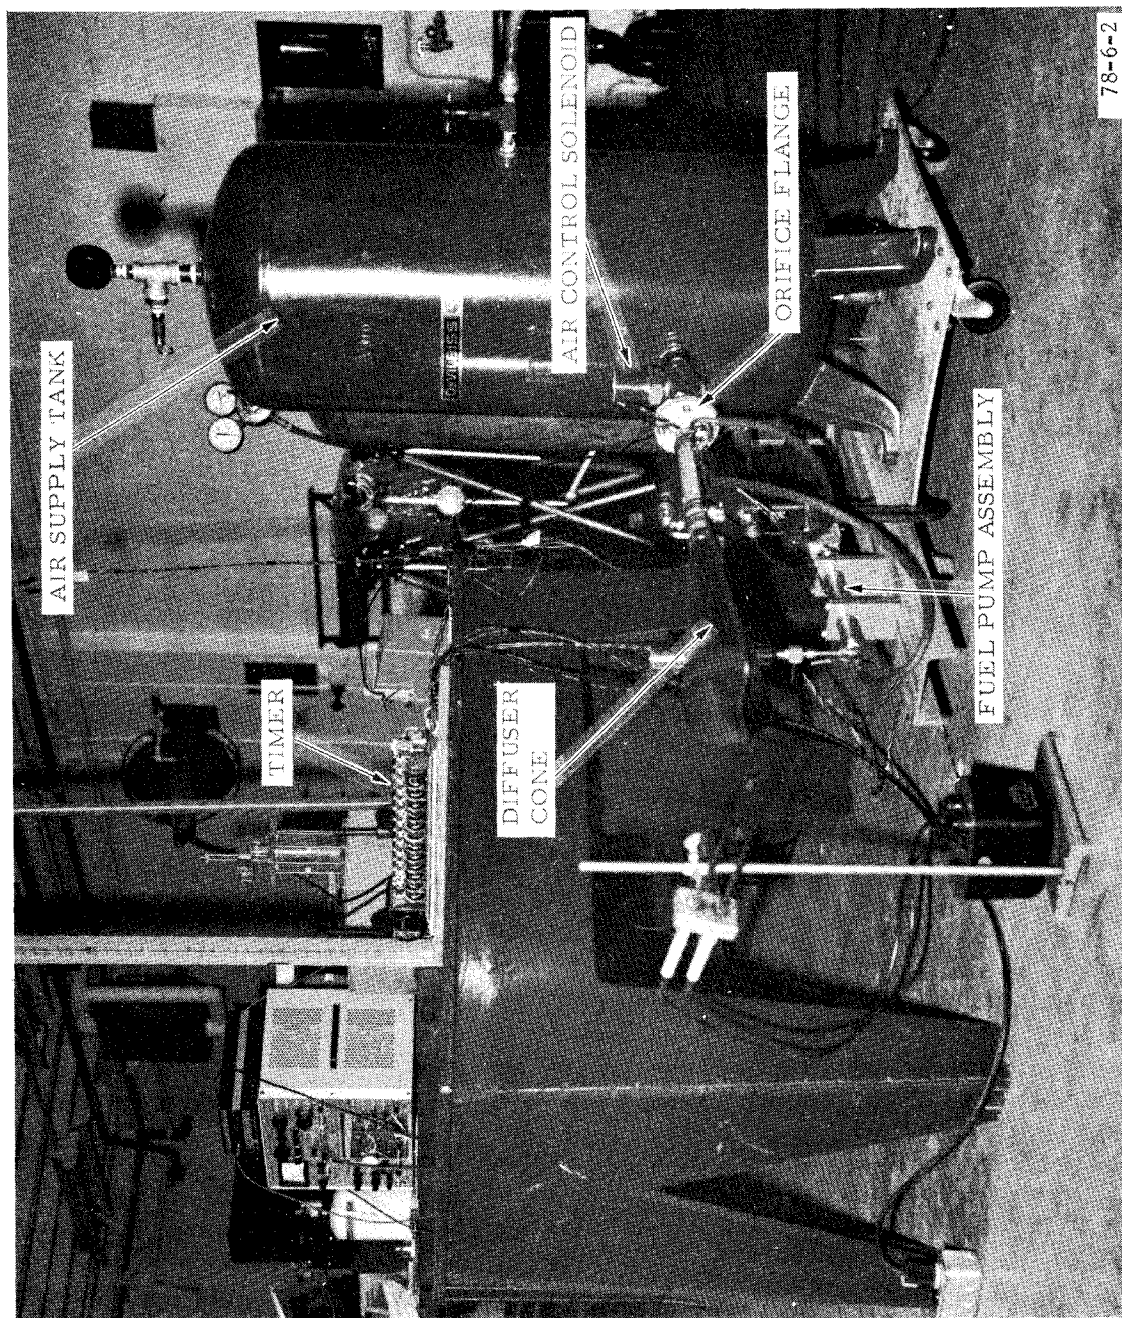


FIGURE 2. BREADBOARD ASSEMBLY

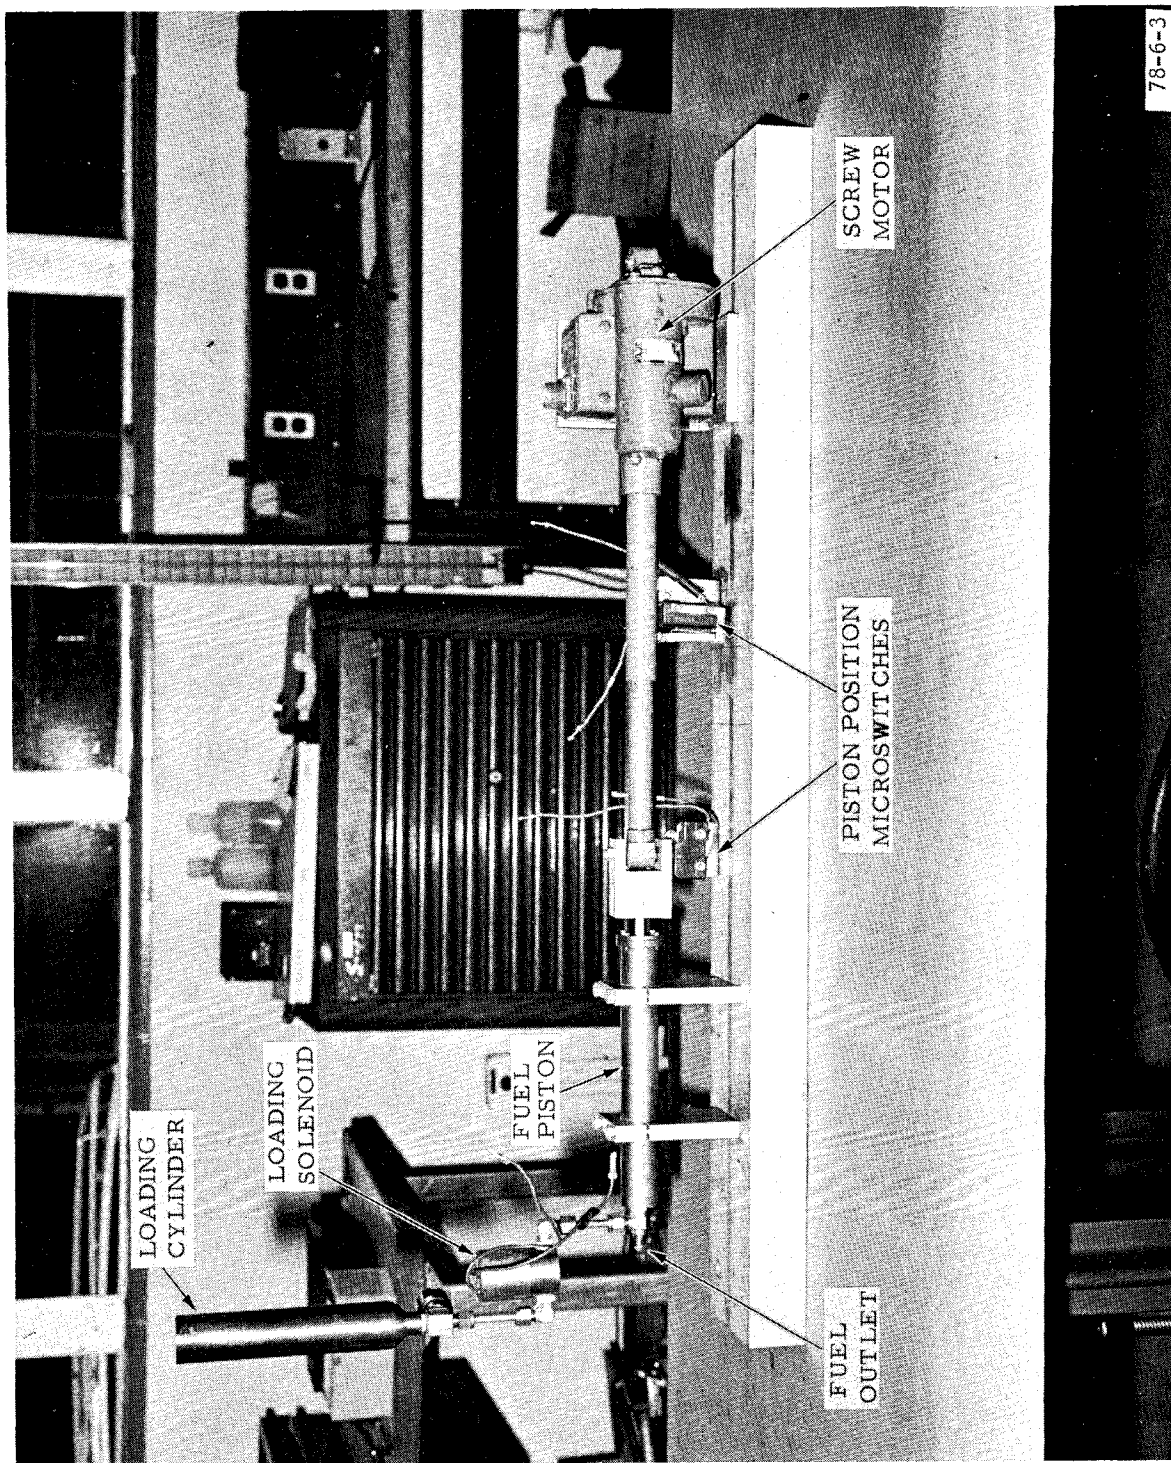


FIGURE 3. FUEL PUMP ASSEMBLY

78-6-3

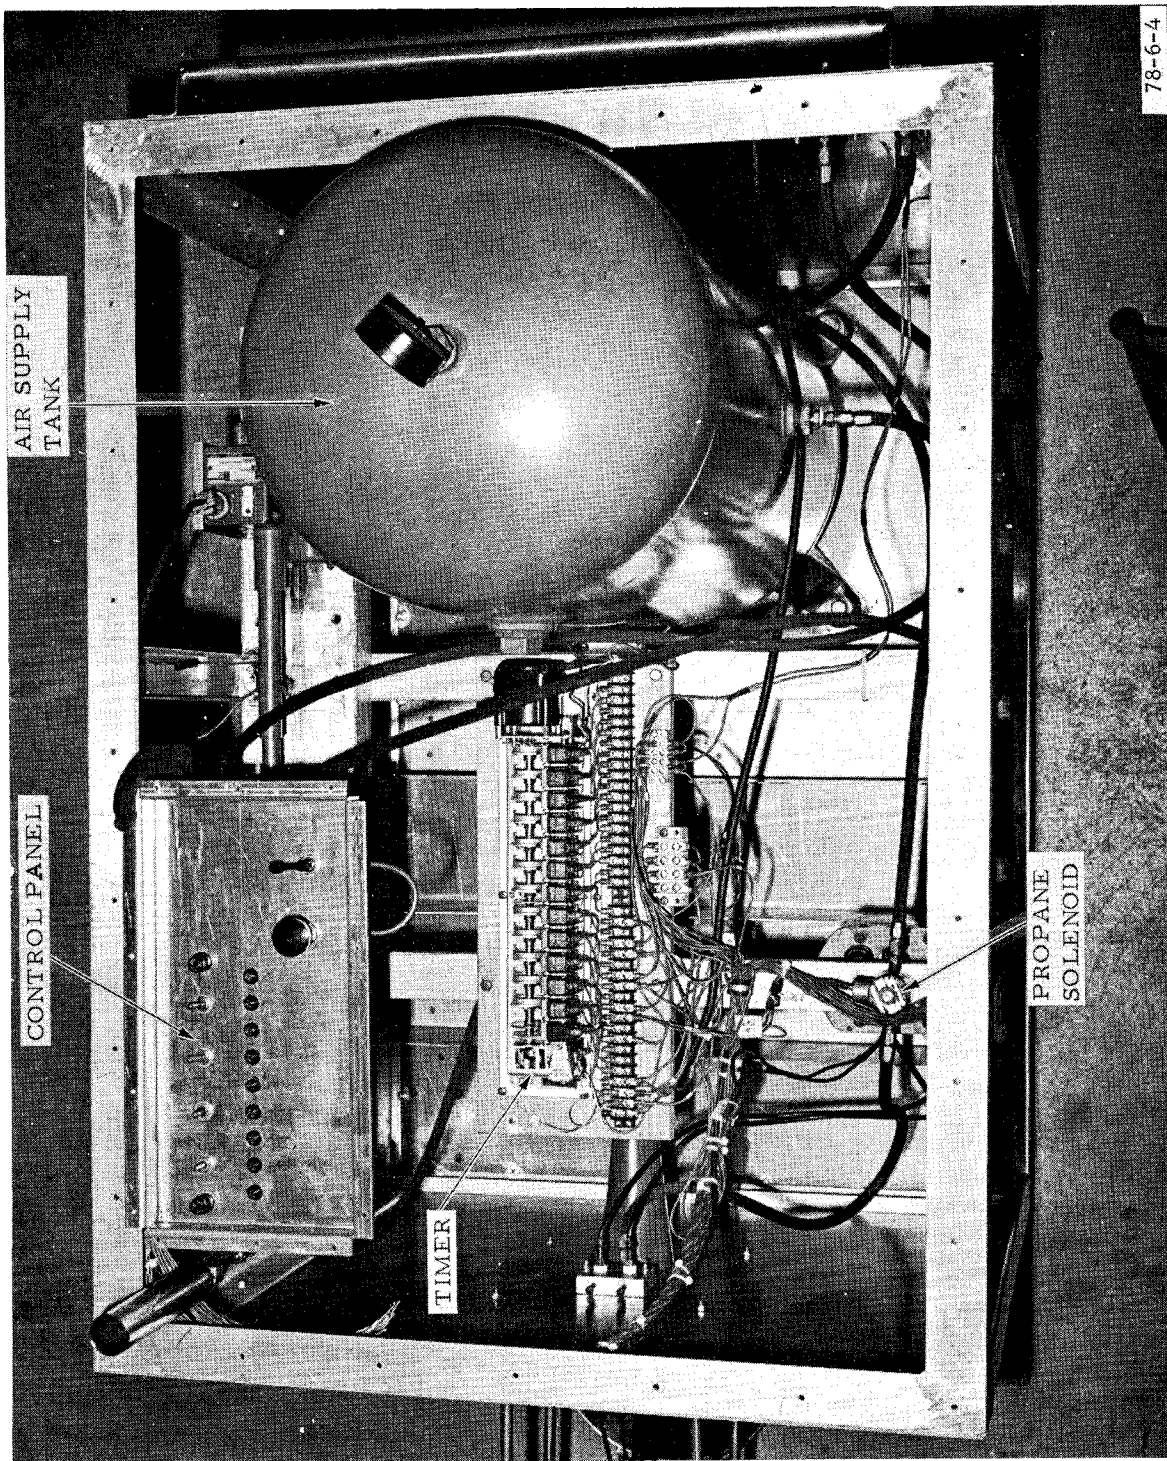


FIGURE 4. TEST APPARATUS - TOP VIEW


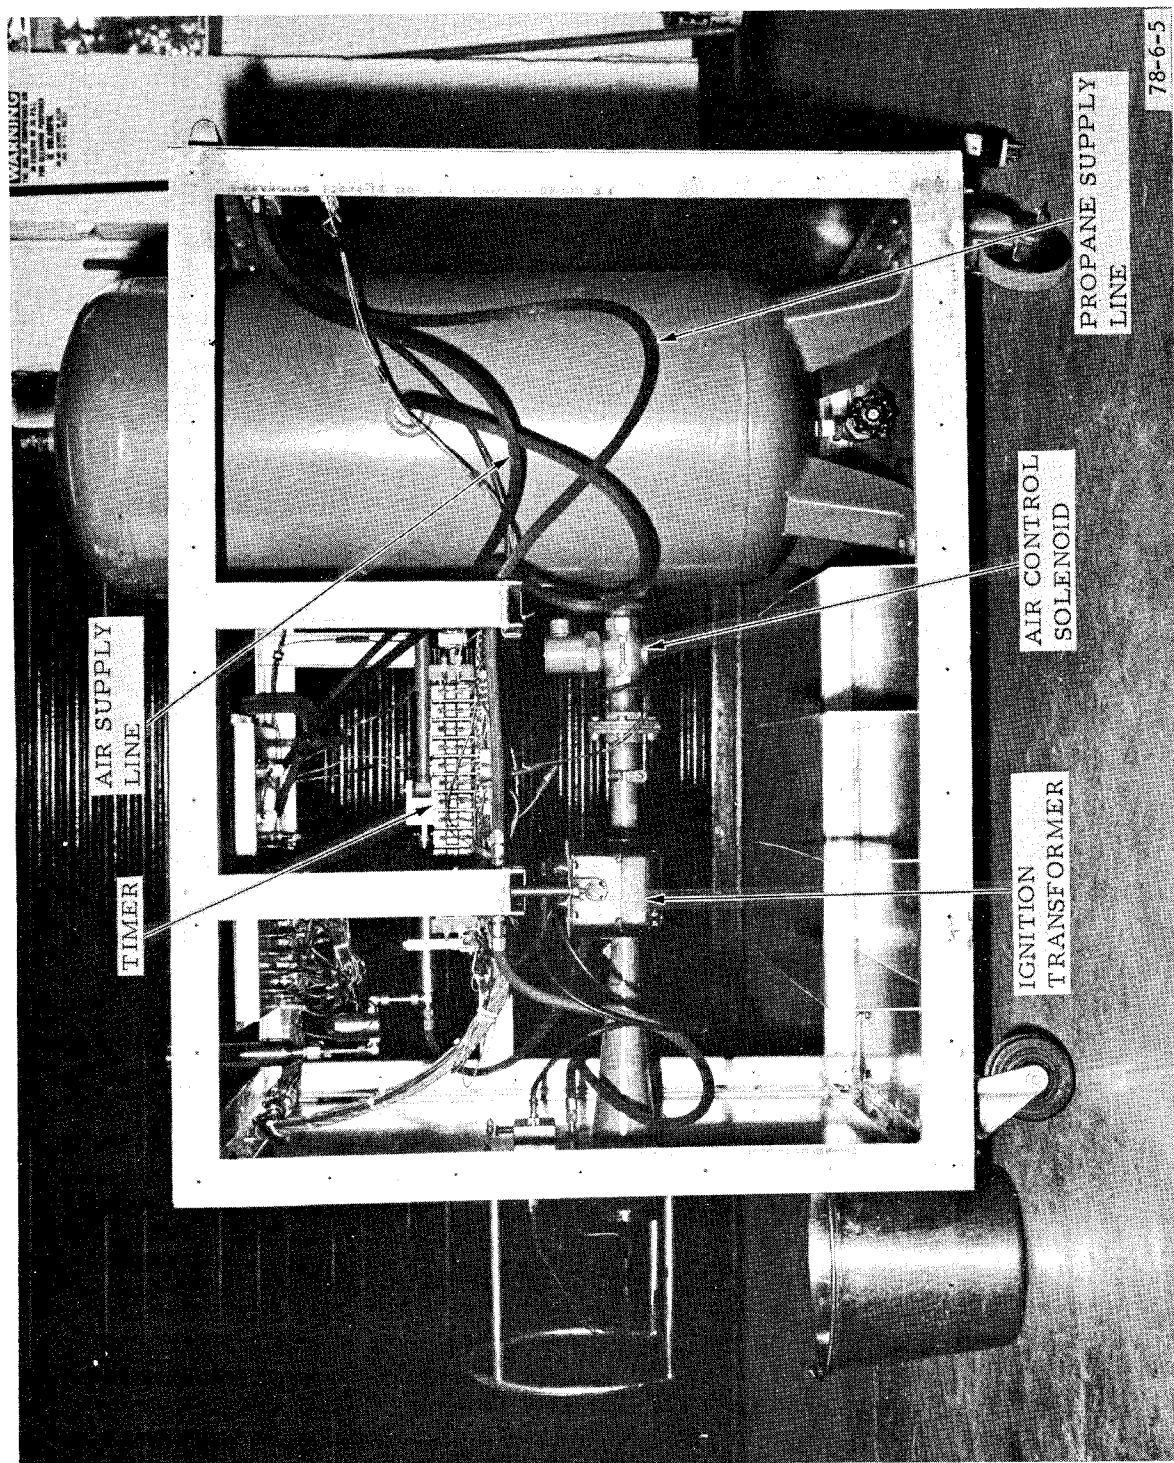



FIGURE 5. TEST APPARATUS - SIDE VIEW

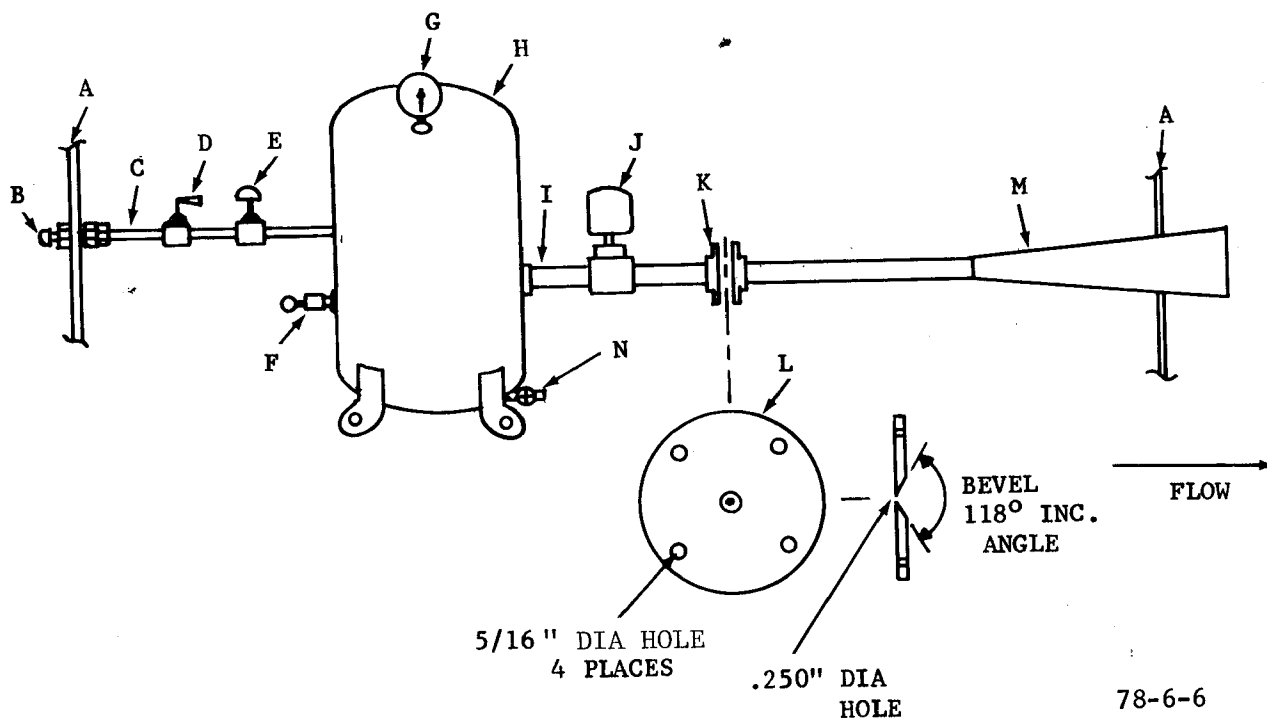

LEGEND

- A. Enclosure, aluminum sheet and angle.
- B. Air hose coupling, Schrader 8050-11.
- C. Copper tube, .250 inches x .032 wall (refrigeration).
- D. Air control valve, toggle (off-on) Whitey 1GS4-SS
- E. Air regulator valve (needle) Whitey 1RS4-SS
- F. Safety valve, DeVilbiss Type TA, ASME Std. 1/4 inch, pressure 165 PSI
- G. Gage pressure, Marsh Instrument Co., 0-160 PSI.
- H. Air storage vessel, DeVilbiss TA-470, 30 gallons.
- I. 1 inch, schedule 40 pipe.
- J. Air flow control valve, Atkomatic No. 600 2-way solenoid valve.
- K. 1 inch pipe flange (2).
- L. Orifice plate .125 inch T3 aluminum.
- M. Deceleration cone, .018 inch thick steel.
- N. Condensate drain, 1/2 inch-brass valve.

FIGURE 6. AIR SUPPLY SYSTEM

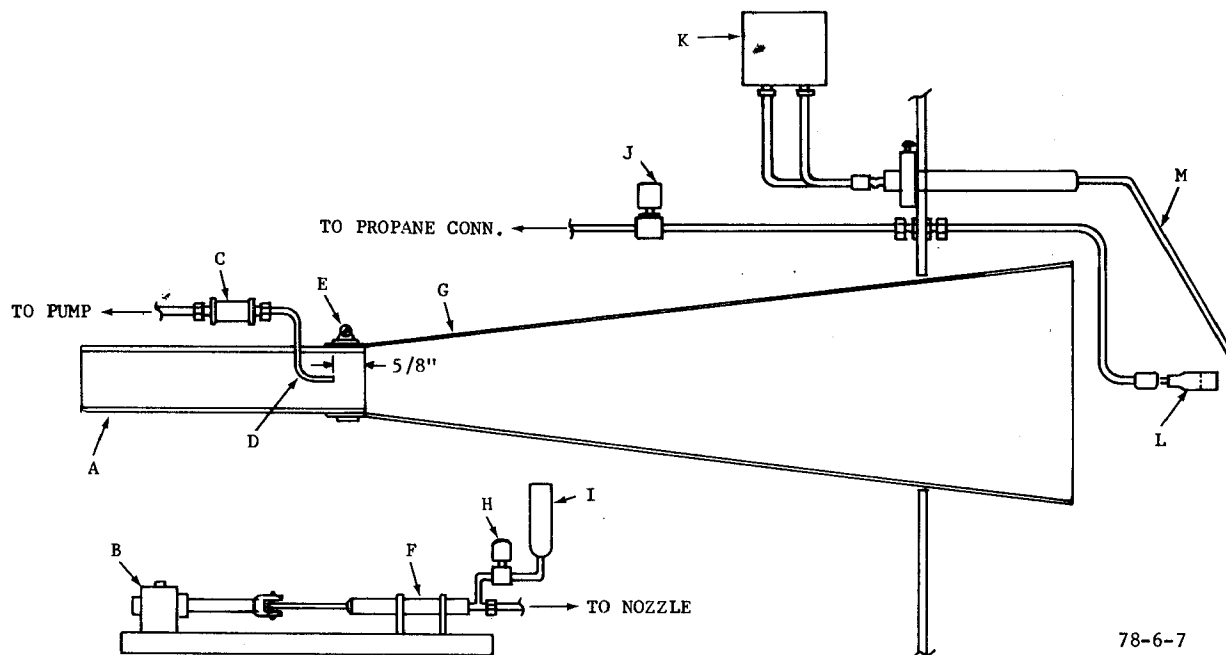

LEGEND

- A. Air tube, 1 inch schedule 40 pipe.
- B. Linear actuator, Airesearch mod. ELA 8-49-3
- C. Check valve, NUPRO SS-4C-1/3
- D. Fuel nozzle, open 1/4 inch stainless tube
- E. Mount clamp, 1 1/2 inch hose
- F. Pump
- G. Deceleration cone, 14 3/8 inches long x 4 inches diameter air exit
- H. Pump reload solenoid, Skinner V52DA2100
- I. Pump reload reservoir
- J. Propane control solenoid, Skinner V52DB2022
- K. Ignition transformer, type 312-2AABC-202
- L. Propane nozzle, Bernzomatic
- M. Propane ignition electrodes

FIGURE 7. FUEL ATOMIZATION SECTION

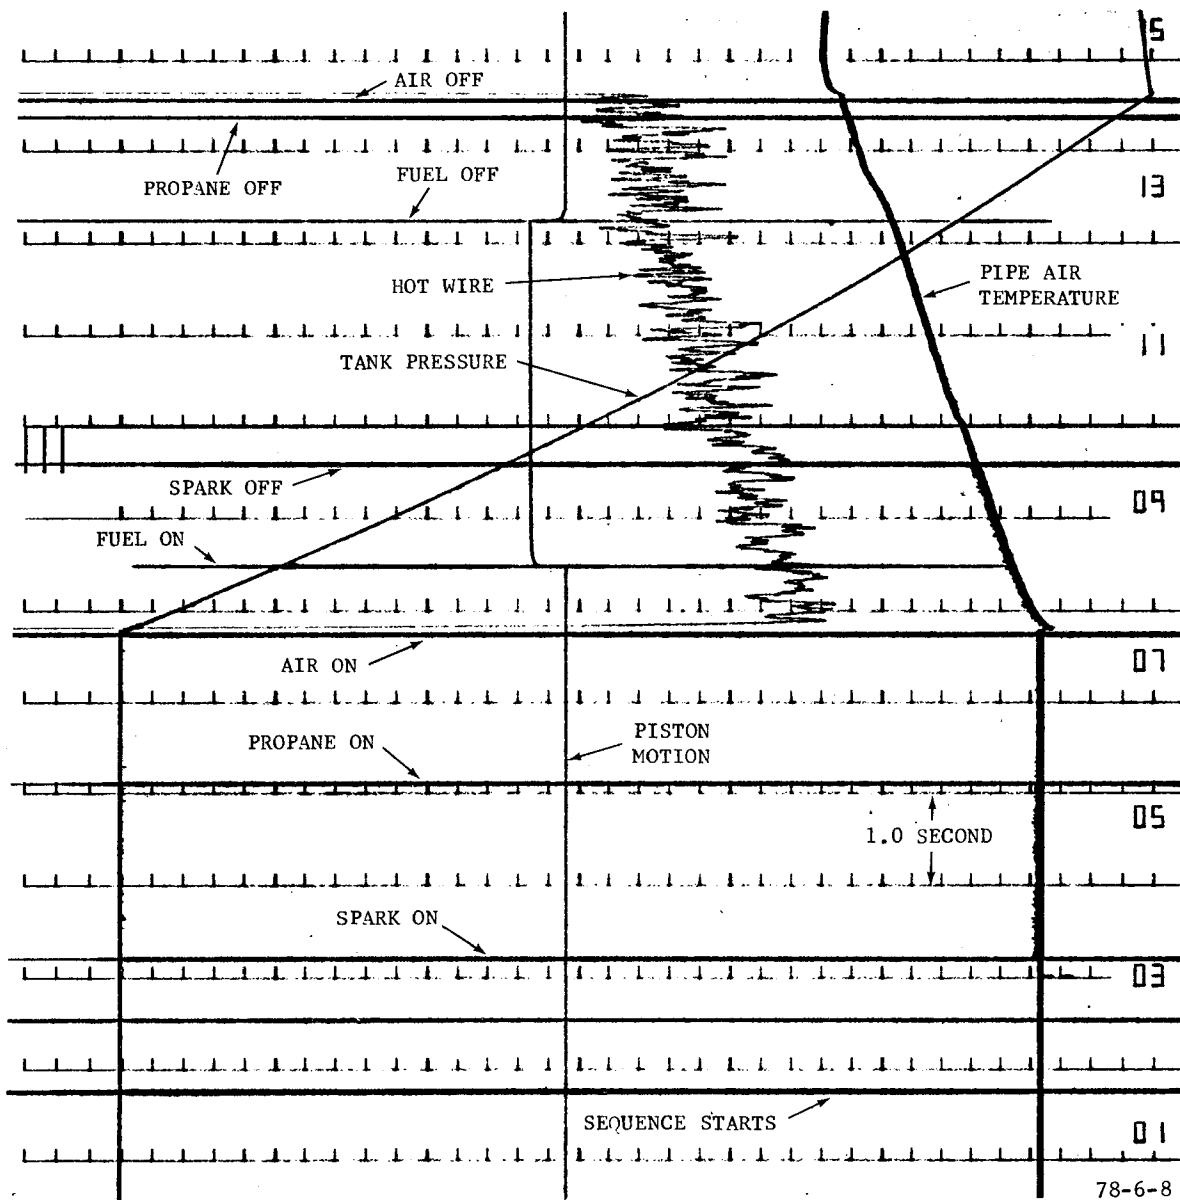


FIGURE 8. OSCILLOGRAPH RECORD

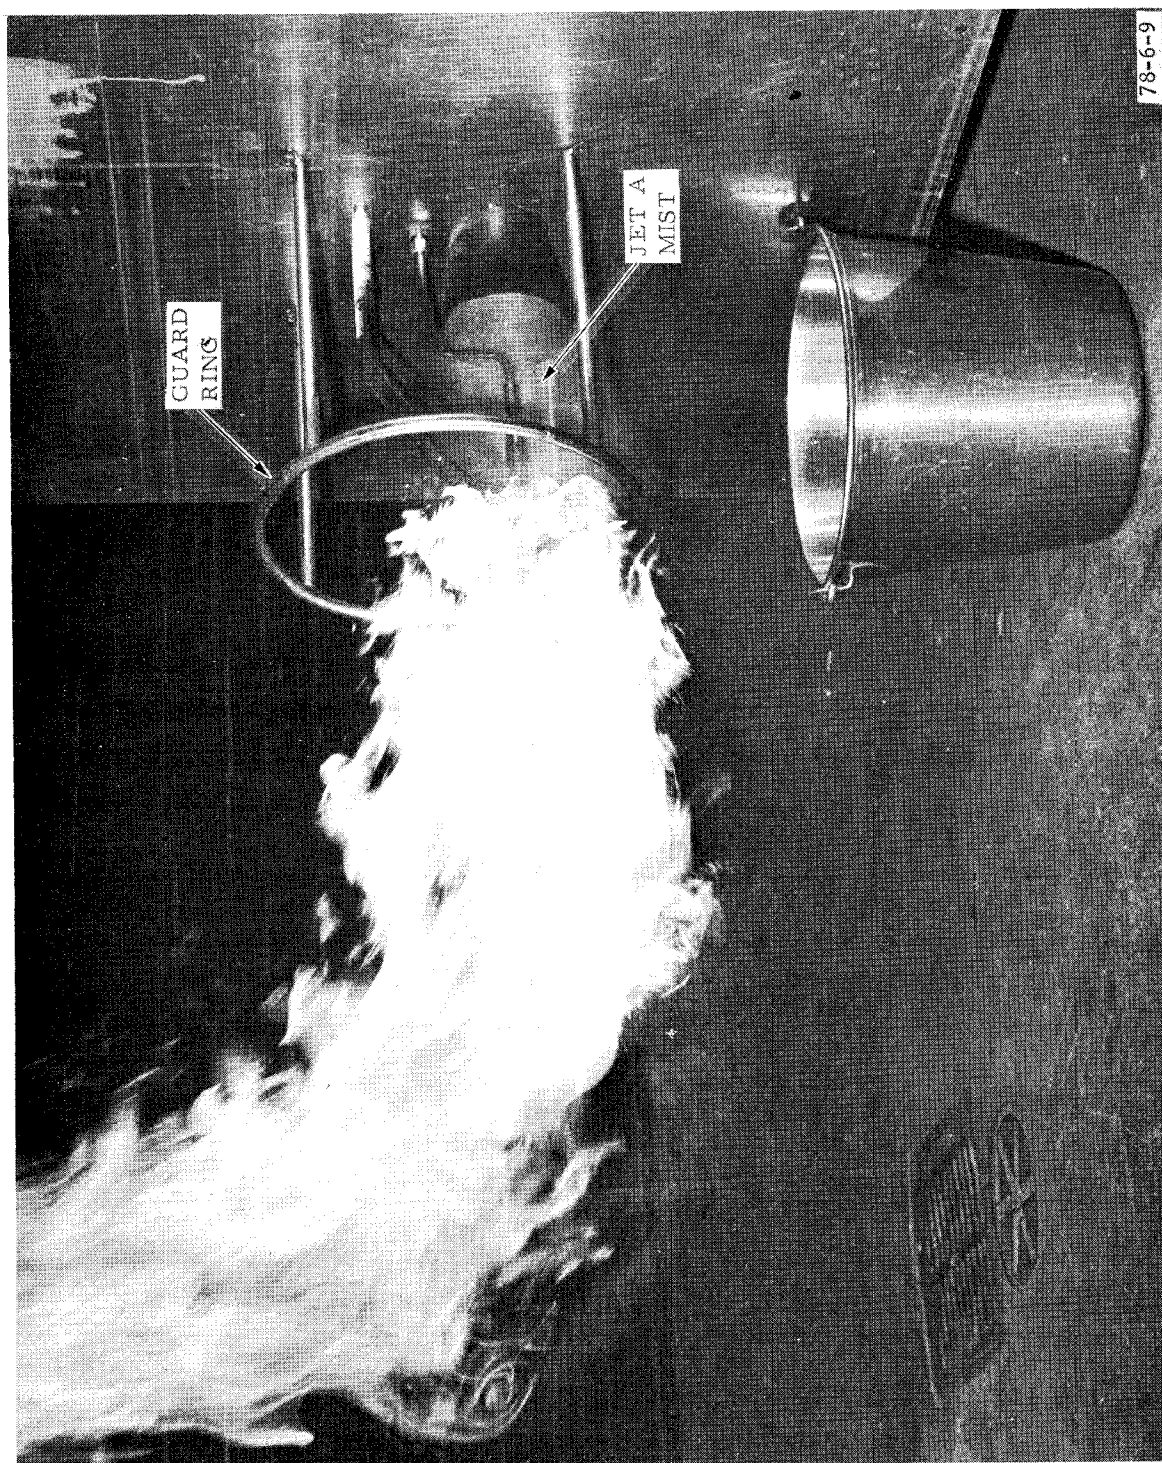


FIGURE 9. JET A TEST

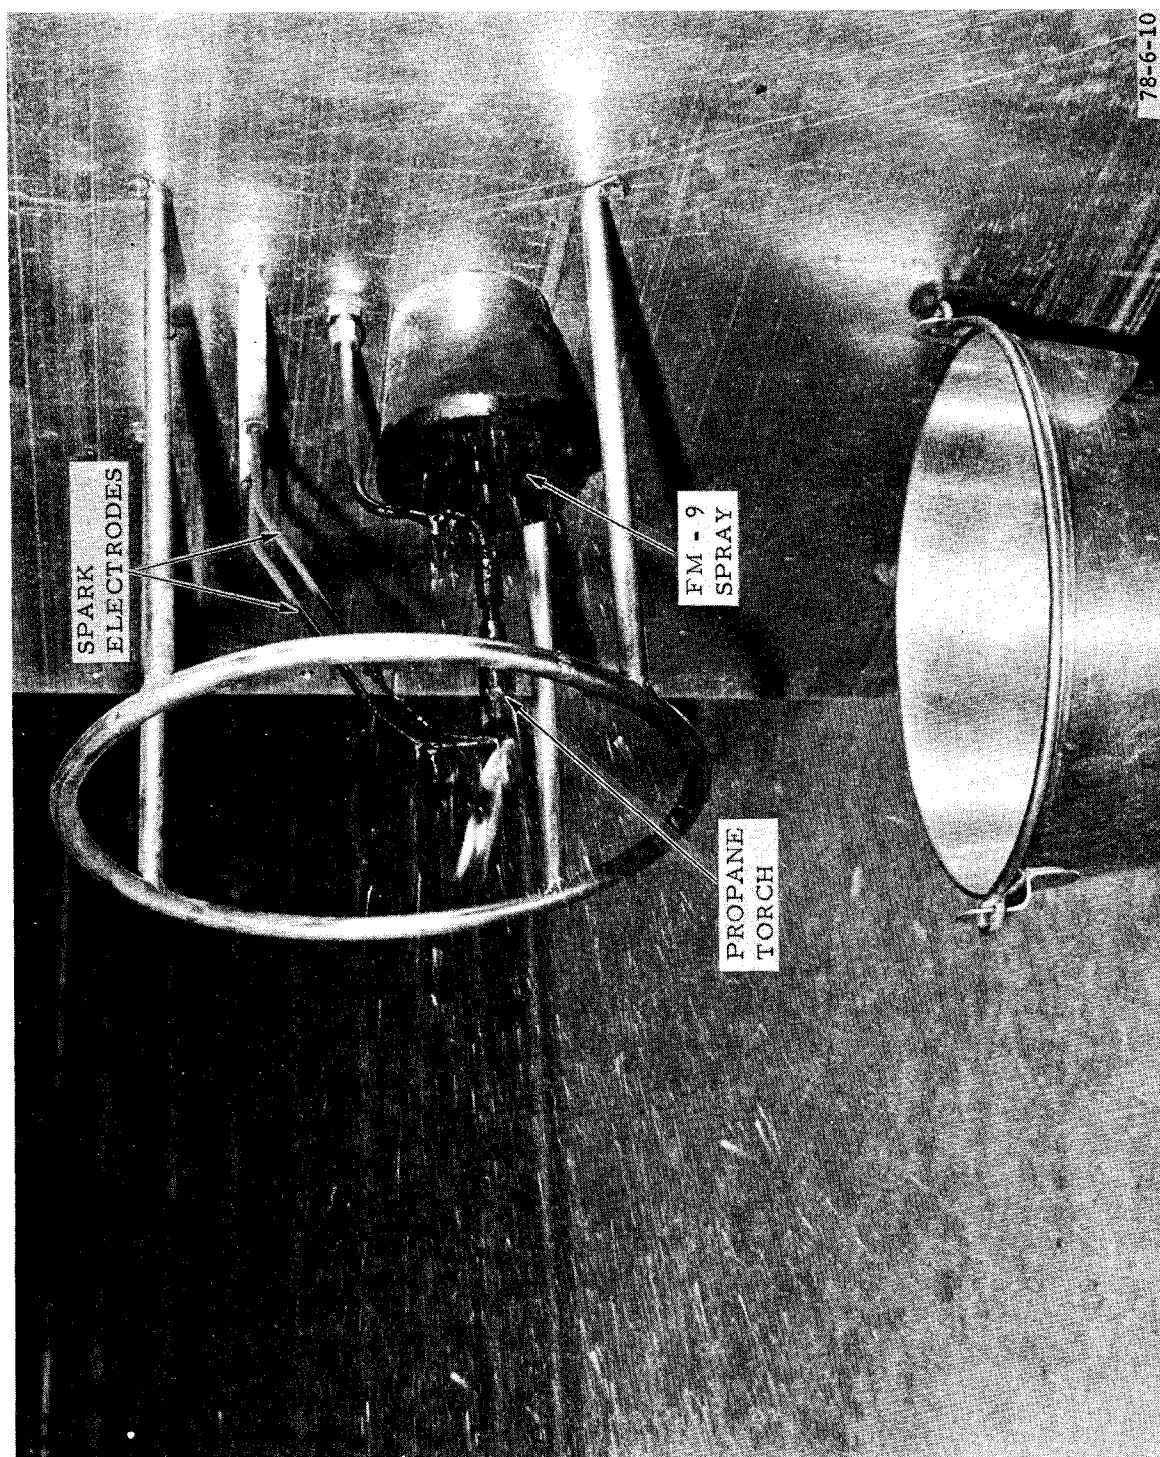


FIGURE 10. FM-9 TEST